


CARBOPAN GS

Activated Carbon Panel Filter

Special Features

Product Code:	KK-GS-ZX
Frame:	Galvanized Steel
Filter Media:	Synthetic Fiber Impregnated with activated carbon
Efficiency (EN779):	G4
Filter Class (ISO 16890):	ISO Coarse 65%
Gasket:	Optional
Surface Mesh:	
Final Pressure Drop:	250 Pa
Max. Temperature:	70°C

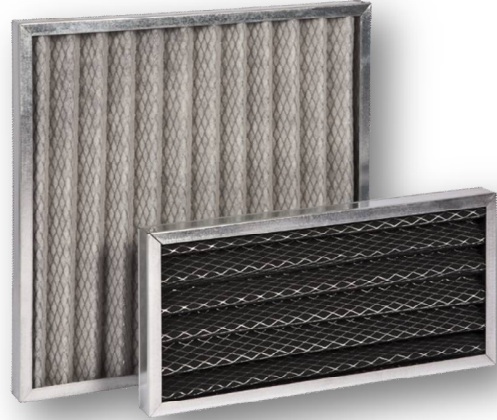


CARBOPAN GS

Applications

- Primary filter for odour and fumes filtration

Advantages

- Robust construction for reliable operation
- Fully supported media laminated onto a wire grid
- Economic operation and high filtration surface
- High dust holding capacity, low pressure drop
- Compact, rigid construction for rapid installation

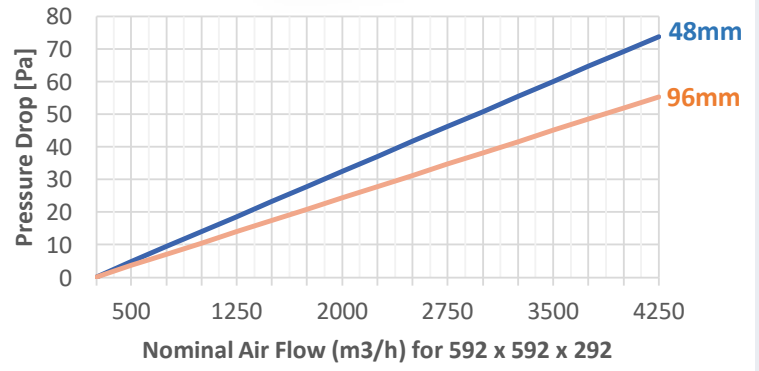

Product Code	Dimensions (mm)	EN 779:2012 Efficiency	ISO 16890 Class	Media Area (m²)	Air Flow (m³/h)	Pressure Drop (Pa)	Weight (Kg)
KK-GS-ZX-287/287/48-ZW	287x287x48	G4	ISO Coarse %65	0,17	850	55	0,7
KK-GS-ZX-392/492/48-ZW	392x492x48	G4	ISO Coarse %65	0,40	1950	55	1,3
KK-GS-ZX-492/492/48-ZW	492x492x48	G4	ISO Coarse %65	0,50	2600	55	1,6
KK-GS-ZX-492/625/48-ZW	492x625x48	G4	ISO Coarse %65	0,62	3000	55	2,0
KK-GS-ZX-287/592/48-ZW	287x592x48	G4	ISO Coarse %65	0,34	1700	55	1,2
KK-GS-ZX-492/592/48-ZW	492x592x48	G4	ISO Coarse %65	0,60	2820	55	1,8
KK-GS-ZX-592/592/48-ZW	592x592x48	G4	ISO Coarse %65	0,70	3400	55	2,1
KK-GS-ZX-287/287/96-ZW	287x287x96	G4	ISO Coarse %65	0,25	850	40	1,2
KK-GS-ZX-392/492/96-ZW	392x492x96	G4	ISO Coarse %65	0,60	1950	40	2,3
KK-GS-ZX-492/492/96-ZW	492x492x96	G4	ISO Coarse %65	0,75	2600	40	2,6
KK-GS-ZX-492/625/96-ZW	492x625x96	G4	ISO Coarse %65	0,95	3000	40	3,2
KK-GS-ZX-287/592/96-ZW	287x592x96	G4	ISO Coarse %65	0,50	1700	40	2,0
KK-GS-ZX-492/592/96-ZW	492x592x96	G4	ISO Coarse %65	0,90	2820	40	3,2
KK-GS-ZX-592/592/96-ZW	592x592x96	G4	ISO Coarse %65	1,10	3400	40	3,9