

# CARBOPAN GD

## Activated Carbon Panel Filter

### Special Features

Product Code:	KD-GK-DX
Frame:	Galvanized Steel
Filter Media:	Activated Carbon Pellet
Filter Class:	Odour filtration
Gasket:	Optional



Max. Relative Humidity:	70%
Max. Temperature:	55°C

### Applications

- Adsorption of odour and gases in air conditioning applications

### Advantages

- Robust construction for reliable operation
- Vibrated fill technique to prevent media settlement
- Economic operation and high filtration surface
- Available in gas adsorption and chemisorption
- Compact, rigid construction for rapid installation

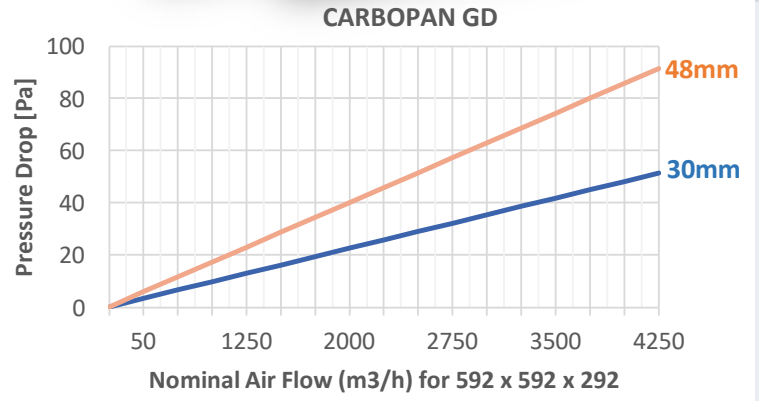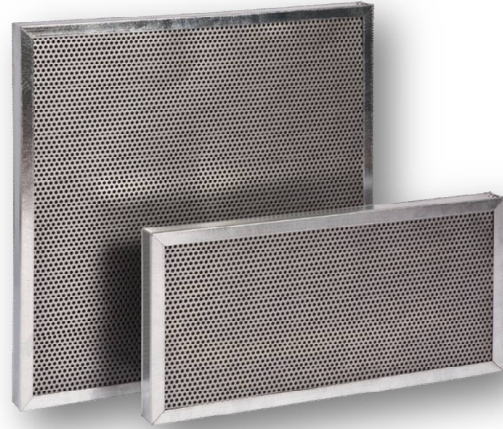

Product Code	Dimensions (mm)	Carbon Type	Contact Time	Media Area (m²)	Air Flow (m³/h)	Pressure Drop (Pa)	Weight (Kg)
KD-GK-DX-287/287/30-AC	287x287x30	Organic	0.25-0.35	1,35	85	45	2,8
KD-GK-DX-392/492/30-AC	392x492x30	Organic	0.25-0.35	3,20	200	45	5,4
KD-GK-DX-492/492/30-AC	492x492x30	Organic	0.25-0.35	4,00	240	45	8
KD-GK-DX-492/625/30-AC	492x625x30	Organic	0.25-0.35	5,00	310	45	9
KD-GK-DX-287/592/30-AC	287x592x30	Organic	0.25-0.35	2,80	175	45	5,5
KD-GK-DX-492/592/30-AC	492x592x30	Organic	0.25-0.35	4,80	290	45	9,8
KD-GK-DX-592/592/30-AC	592x592x30	Organic	0.25-0.35	5,80	350	45	11,5
KD-GK-DX-287/287/48-AC	287x287x48	Organic	0.25-0.35	2,20	85	80	3,5
KD-GK-DX-392/492/48-AC	392x492x48	Organic	0.25-0.35	5,00	200	80	6,75
KD-GK-DX-492/492/48-AC	492x492x48	Organic	0.25-0.35	6,40	240	80	10
KD-GK-DX-492/625/48-AC	492x625x48	Organic	0.25-0.35	8,00	310	80	11,2
KD-GK-DX-287/592/48-AC	287x592x48	Organic	0.25-0.35	4,50	175	80	6,9
KD-GK-DX-492/592/48-AC	492x592x48	Organic	0.25-0.35	7,70	290	80	12
KD-GK-DX-592/592/48-AC	592x592x48	Organic	0.25-0.35	9,00	350	80	14,5