

RIGICARB PS

Activated W Compact Filter

Special Features

Product Code:	KW-PC-XX
Frame / Header:	Plastic (PS) / 25mm
Filter Media:	Activated Carbon Granules Between Synthetic Layers
Efficiency (EN779):	F7
Filter Class (ISO 16890):	ISO ePM2,5 65%
Gasket / Type:	Optional - EPDM / PU
Bonding Media:	Two Component Polyurethane
Filter Media:	450 g/m ²

Final Pressure Drop:	450 Pa
Max. Temperature:	70°C

Applications


- Molecular filter for high efficiency and long-term control of molecular contaminants in air

Advantages

- Rigid construction filter used in narrow space
- High performance with high contamination removal capacities without dust release filter media
- Large filtration surface with progressively develop activated carbon media for low initial pressure drop



RIGIBAG PS

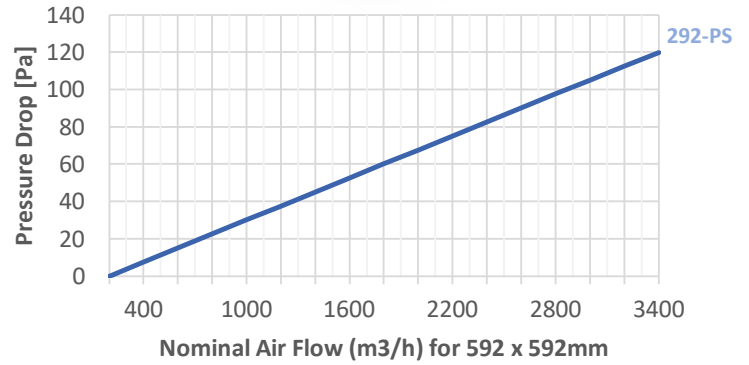

Product Code	Dimensions (mm)	EN 779:2012 Efficiency	ISO 16890 Class	Media Area (m²)	Air Flow (m³/h)	Pressure Drop (Pa)	Weight (Kg)
KW-PC-XX-287/592/292-CF7	287x592x292	F7	ISO ePM1 55%	4,50	1700	120	4,5
KW-PC-XX-492/592/292-CF7	492x592x292	F7	ISO ePM1 55%	7,20	2750	120	7,5
KW-PC-XX-592/592/292-CF7	592x592x292	F7	ISO ePM1 55%	9,00	3400	120	8,2