

# CARBOHIGH G20

## Activated Carbon V Cell Filter

### Special Features

Product Code:	KH-GE-20
Frame:	Galvanized Steel
Filter Media:	Activated Carbon Pellet
Filter Class:	Gas Adsorption
Gasket:	EPDM

Max. Relative Humidity:	70%
Max. Temperature:	50°C

### Applications


- Adsorption of odour and gases in air conditioning applications

### Advantages

- Robust construction for reliable operation
- Vibrated fill technique to prevent media settlement
- Economic operation and high filtration surface
- Available in gas adsorption and chemisorption
- Compact, rigid construction for rapid installation



CARBOHIGH G20

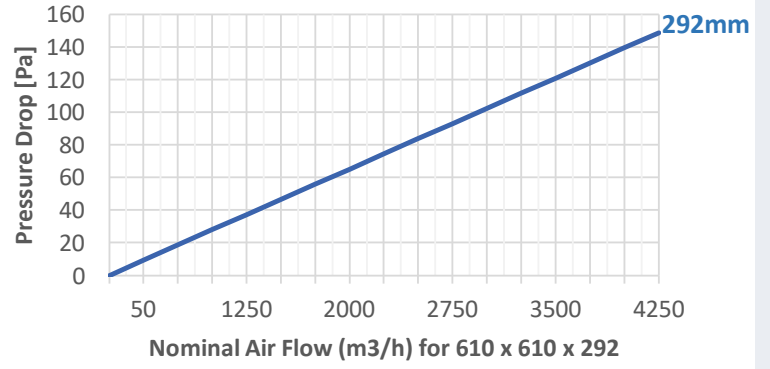

Product Code	Dimensions (mm)	Carbon Type	Min. Contact Time	Carbon Weight (Kg)	Air Flow (m³/h)	Pressure Drop (Pa)	Weight (Kg)
KH-GE-20-305/305/292-CA	305x305x292	Organik	0,2	7,5	500	120	9,5
KH-GE-20-305/610/292-CA	305x610x292	Organik	0,2	12,0	1000	120	15,0
KH-GE-20-610/610/292-CA	610x610x292	Organik	0,2	20,0	2000	120	24,0